


VSM Multi-Sizer Separator

The reliable, operator-friendly BRANDT VSM Multi-Sizer separator provides high performance and flexibility for modern-day drilling practices.

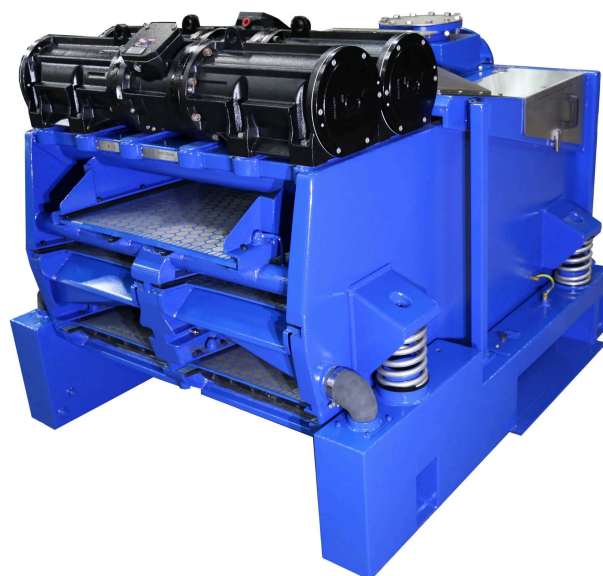

VSM Multi Sizer Separator

*Varies with optional customization. Typical values shown for flow divider. Please contact a BRANDT representative for specific dimension and weight information.

Have a question? [Contact us.](#)

Weir height	45 in. (1143 mm)
Weight*	6035 lbs (2743 kg) – Feed box option
Basket angle	Fixed
Scalping deck angle	+2°
First primary deck angle	+7°
Second primary deck angle	+7°
Total screening area	73 ft ² (6.79 m ²)
Scalping deck screening area	20.6 ft ² (1.91 m ²) - (3 screens)
First primary deck screening area	26.2 ft ² (2.44 m ²) - (4 screens)
Second primary deck screening area	26.2 ft ² (2.44 m ²) - (4 screens)
Screen type	Pretension; Repairable
Screen-securing system	Pneumoseal (air-operated; quick release)
Motor type	(2) Totally enclosed non-ventilated (TENV)
Motor power (each)	4 hp (3 kw)
Vibration motion	Balanced elliptical

Have a question? Contact us.

Compressed air requirements	85–90 psi
Compressed air capacity	0.01 m ³ /min (0.5 ft ³ /min)